


MMIC GAIN BLOCK

- * Wideband Operation : 100 - 3000 MHz
- * Excellent Gain Flatness
- * High Intercept Point
- * Extremely Low Cost Gain Block
- * 100% Tested For Stability

APPLICATIONS:

- * Mobile Infrastructure
- * CATV / DBS
- * W-LAN / ISM
- * WI-FI
- * RFID
- * Fixed Wireless
- * All Purpose Gain Block, Driver Amp

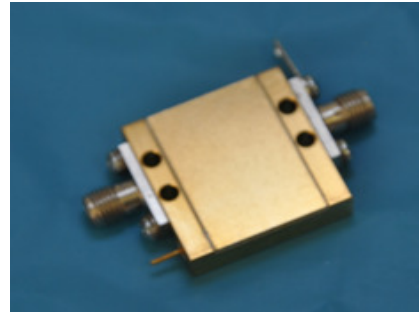

ELECTRICAL SPECIFICATION @ VDD= +12 VDC, Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	100		3000	MHz
Gain	G	11	12		dB
Gain Flatness	ΔG		± 0.4	± 0.75	dB
Power Output	P1dB	24	26		dBm
Return Loss in/out	S11/S22		1.6:1	2.0:1	Ratio
3rd Order Intermodulation (2 Tones @ 10 dBm)	IP3	36	40		dBm
2nd Order Intermodulation (2 Tones @ 10 dBm)	IP2	55	60		dBm
Noise Figure	NF		4	5.5	dB
Operating Voltage	Vdc		12		Volts
Operating Current	Id		200		mA

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	1.0 x 1.0 x .375		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Feedthru Pin		

PROTECTIONS

	Max	
RF Input Power	20	dBm
Reverse Polarity Protection		
Load VSWR	5:01	RATIO
Stability	Unconditional	





ENVIROMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		150°C	°C





3009 Old State Rd Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

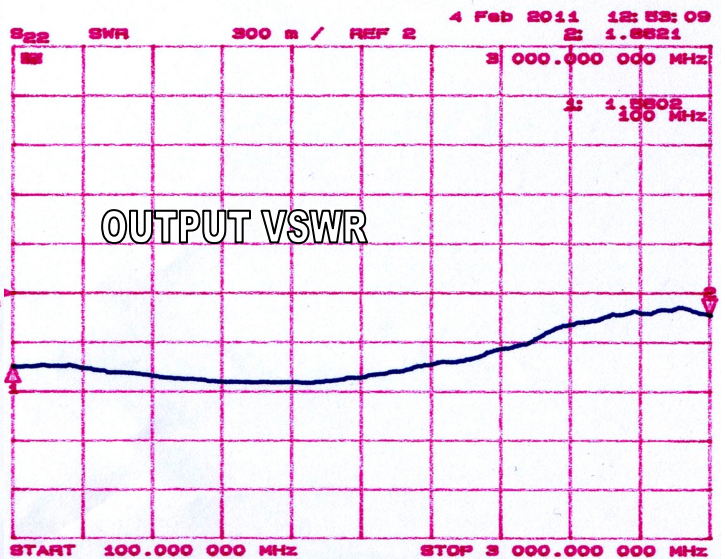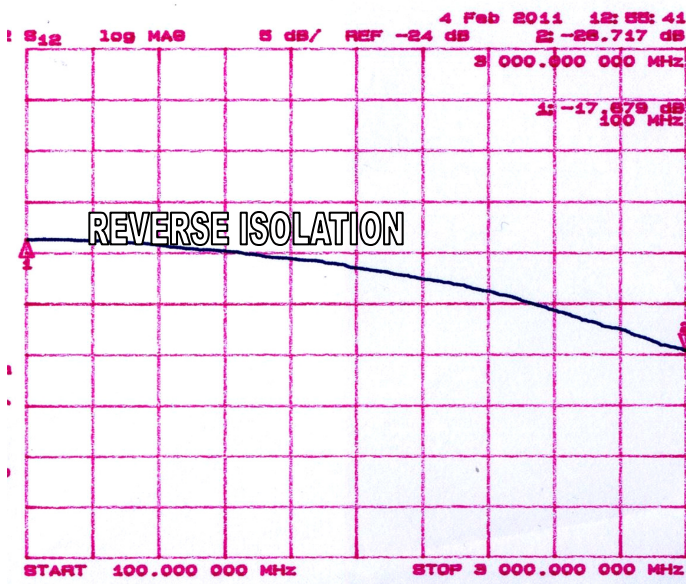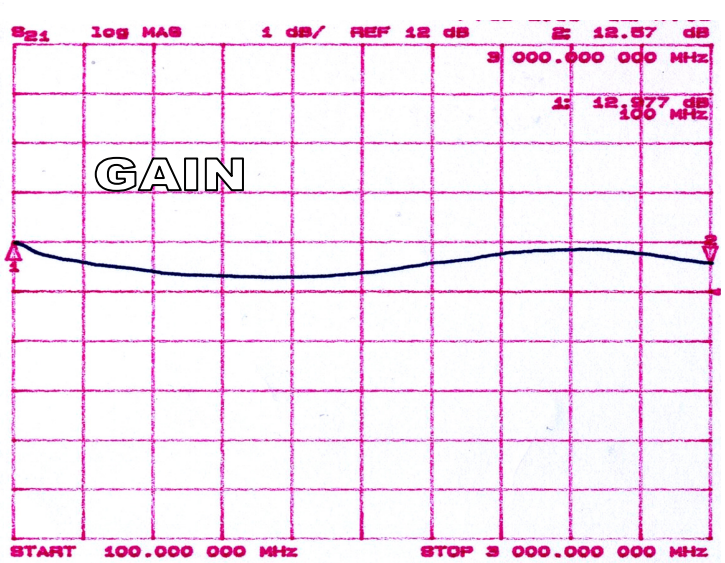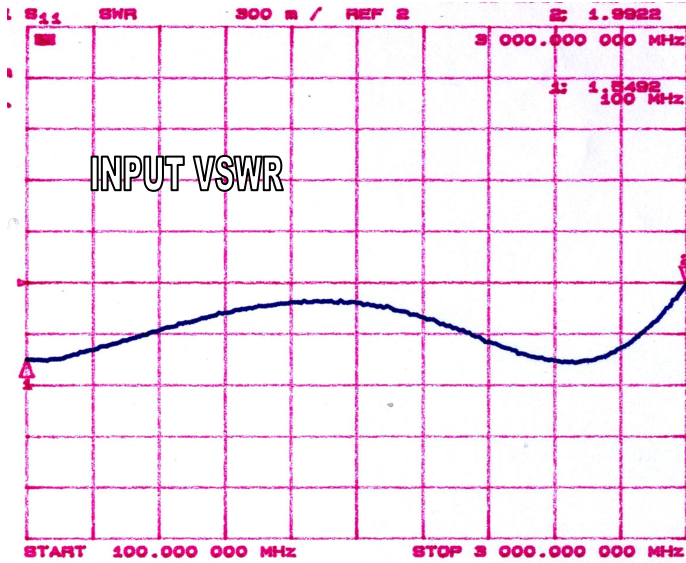

3rd ORDER INTERMODULATION PRODUCTS

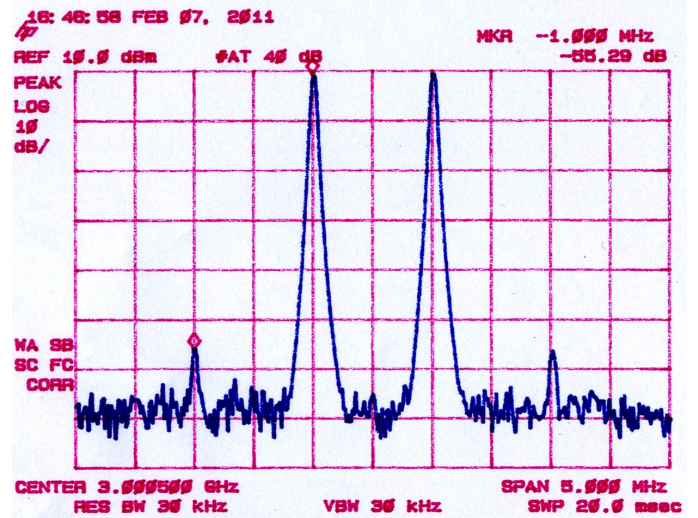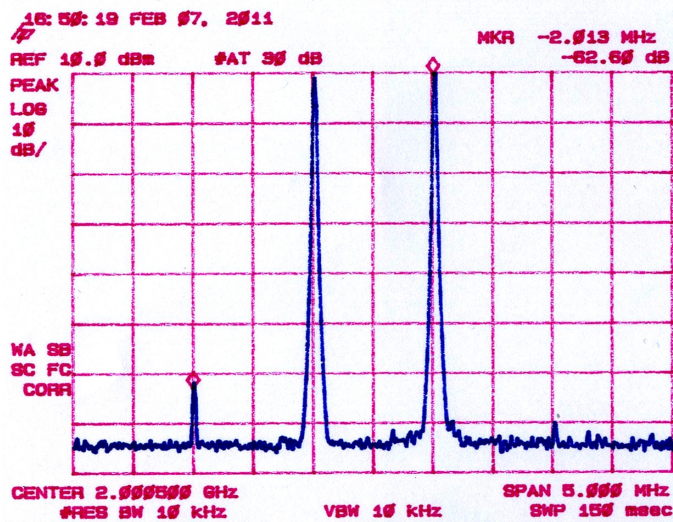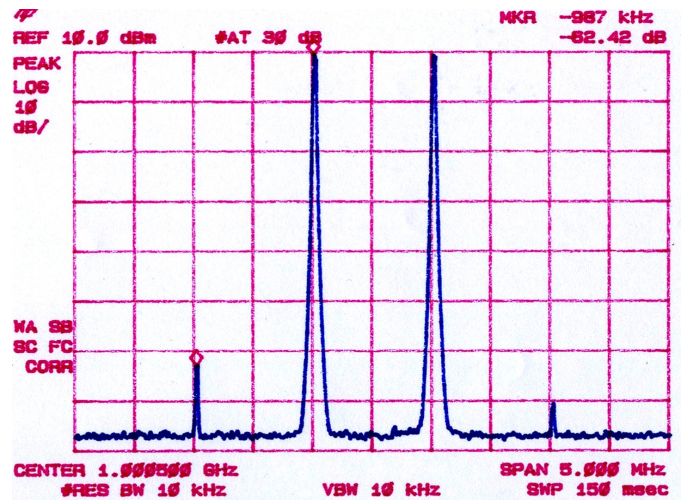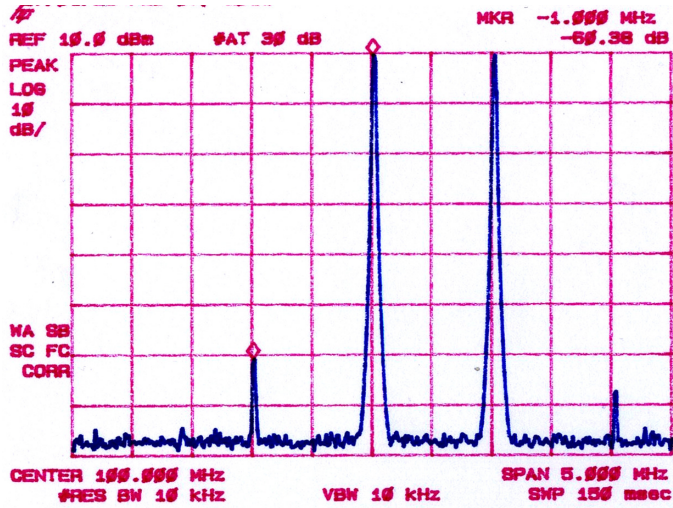

Power output @ 1dB Compression

100 Mhz	26.0 dBm
1000 Mhz	26.2 dBm
2000 Mhz	26.0 dBm
3000 Mhz	24.0 dBm

Noise Figure


100 Mhz	3.0 dB
1000 Mhz	3.6 dB
2000 Mhz	4.5 dB
3000 Mhz	5.2 dB

3009 Old State Rd Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

OUTLINE DRAWING

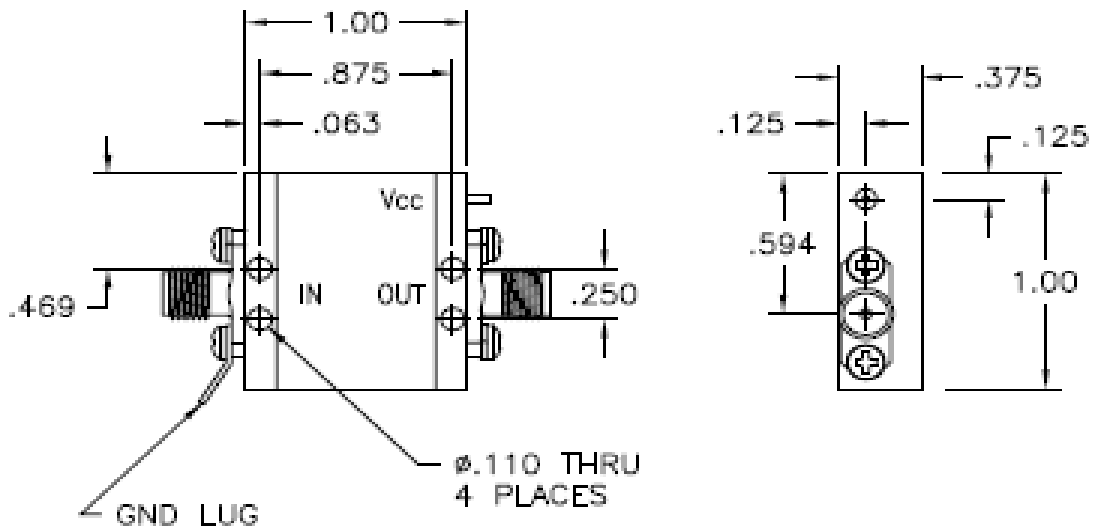

3009 Old State Rd Telford Pa 18969