


RF Amplifier

- * Operating Frequency : 200-1800 MHz
- * Gain : 38 dB
- * Psat 10WATT
- * High Gain available

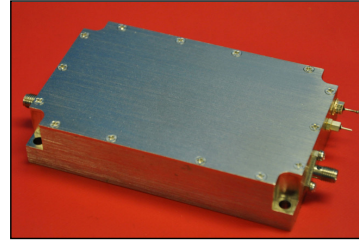

ELECTRICAL SPECIFICATION @ VDD= +28 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	200		1800	MHz
Gain	G	35	38		dB
Gain Flatness	Δ G		±1.0	±1.5	dB
Noise Figure	N.F.		5	6	dB
Output Power	Psat	9	10		W
IP3 @ 20dBm output per tone 5MHz apart	IP3	35			dBm
Harmonics	HIP2	-20			dBc
VSWR In	VSWR1		2.0:1	2.5:1	Ratio
Operating Voltage	Vdc		28		Volt
Operating Current Idq	Idq		1000		ma

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
RF connector	SMA-F		
DC Pins	Feedthru		
Cooling	None		
Monitor Connector	None		

PROTECTION

	Max	Units
RF Input Power	7	dBm
Reverse Polarity Protection	N/A	
Load VSWR	Infinite up to 1W	
Stability	100% Tested	


ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0°C		50°C	°C
Storage Temperature	Tstg	-55°C		120°C	°C

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

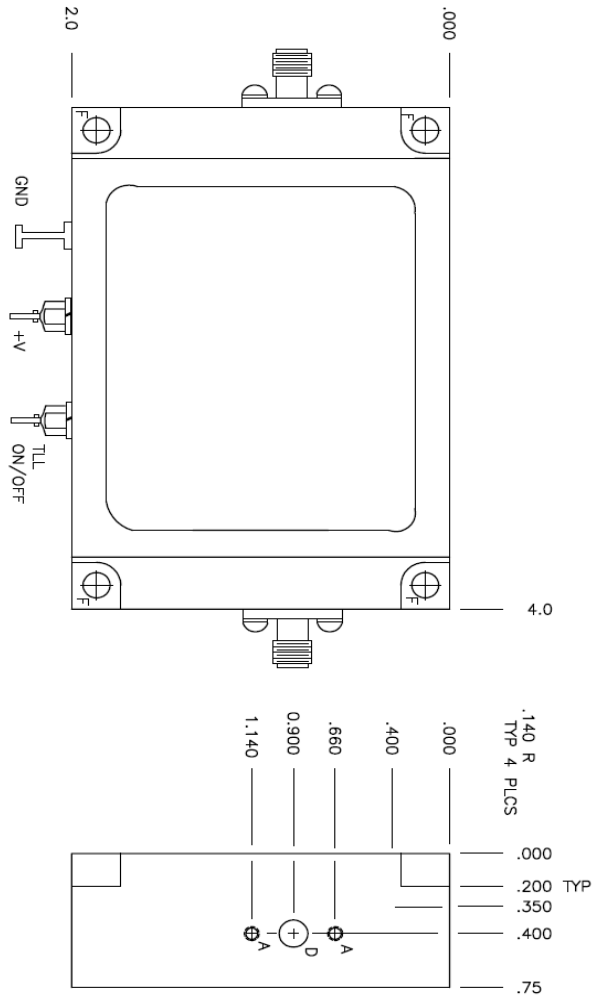

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563