

## Low Noise RF Amplifier

- \* Operating Frequency : 1520-1560 MHz
- \* Linear Power : +10 dBm
- \* Noise Figure : 0.5 dB
- \* Medium Gain : 40 dB



### ELECTRICAL SPECIFICATION @ VDD= +12 VDC; Temp. = 25 °C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1520		1560	MHz
Gain	G	38	40		dB
Gain Flatness	Δ G		±0.3	±0.4	dB
Reverse Isolation	S 12		50		dB
Noise Figure	NF		0.5	0.8	dB
Power Output P1dB	P1dB	8	10		dBm
Output 3rd Order Intercept Point	OIP3	18	20		dBm
VSWR in/out	S11/S22		1.6 :1	2.0 :1	Ratio
Operating Voltage	Vdc		12		Volt
Operating Current	Id		120	150	mA

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2.5x1x.5		in
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		
Cooling	None		

### PROTECTIONS

RF Input Power	-10 dBm Max	
Reverse Polarity Protection	Optional	
Load VSWR		
Stability	100%	

### ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0		50°C	°C
Storage Temperature	Tstg	-40		100°C	°C

3009 Old State Rd, Telford, Pa 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
 Fax: 215-799-2563

Outline Drawing

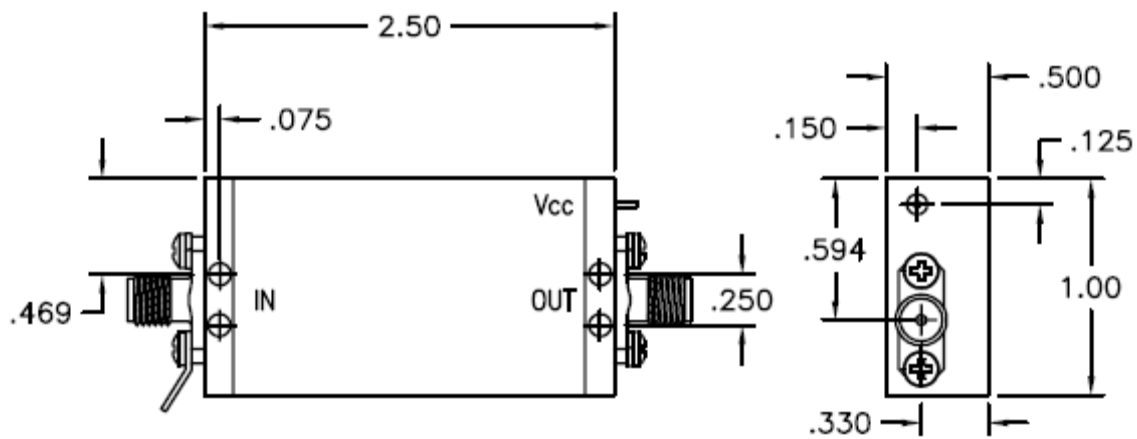

3009 Old State Rd, Telford, Pa 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
Fax: 215-799-2563