

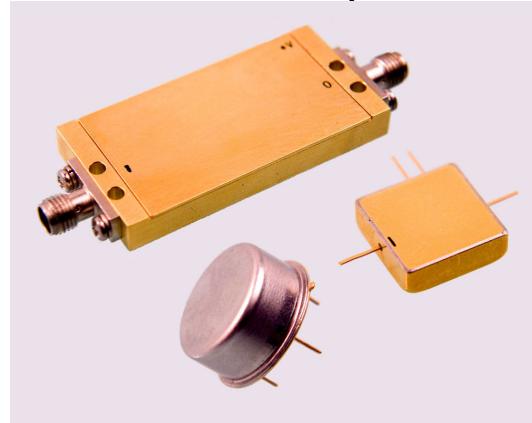
Features: (typical values)

- Wide Band 5-500 MHz.
- Noise Figure 3.0 dB.
- High Gain 42 dB.

Maximum Ratings

Storage Temperature	-62°C to +125°C
DC Voltage	+17 volts
RF Input Power	-10 dBm.
Case Temperature	+100°C

Specifications (Referenced to 50 ohms)

**5-500 MHz
Cascadable Amplifier**


Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		5	500	MHz.
Gain	42	40		dB.
Gain Flatness	±0.5		±1.0	dB.
Gain Var. over temp	0.6			ΔdB.
Pout @ 1dB Comp	+24	+22		dBm.
Noise Figure	2.0		3.0	dB.
Reverse Isolation	60			dB.
IP ₃ /IP ₂ (two-tone)*	45/70	42/65		dBm.
HIP2 (2 nd harm.)	75			dBm.
VSWR In/Out	1.3:1		1.6:1	
Supply Required	+15/450		+15/700	v/mA.

Min. and max. values are from -40°C to +80°C

*IP3 and IP2 are in band output intercept points

