

## RF Amplifier

- \* Operating Frequency : 1000-2000 MHz
- \* Linear Power : 32 dbm
- \* IP3 : 47 dBm
- \* Gain : 37 dB Typical
- \* NF : 3 dB



### ELECTRICAL SPECIFICATION @ VDD= + 24 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1000		2000	MHz
Gain	G	35	37		dB
Gain Flatness	Δ G		±0.25	± 0.35	dB
Noise Figure	N.F.		3	5	dB
Output Power	P1dB	30	32		dBm
IP3 @ +23dBm per tone	IP3	45	47		dBm
IP2 @ +23dBm per tone	IP2	50	60		dBm
VSWR in/out	S11/S22		1.7 :1	2.0:1	Ratio
Operating Voltage	Vdc		24		Volt
Operating Current	Id		620	700	mA

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2.5"x1"x0.5"		inches
RF Connectors IN	SMA-F		
RF Connectors OUT	SMA-F		
DC Connector	Filtercon		
Cooling	None		
Monitor Connector	None		

### PROTECTIONS

RF Input Power	+5 dbm	Max	
Reverse Polarity Protection	Yes		
Load VSWR	Infinite up to 1W		
Stability	100% Tested		

### ENVIRONMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0°C		70°C	°C
Storage Temperature	Tstg	- 55C		120°C	°C

3009 Old State Rd, Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
 Fax: 215-799-2563

Outline Drawing

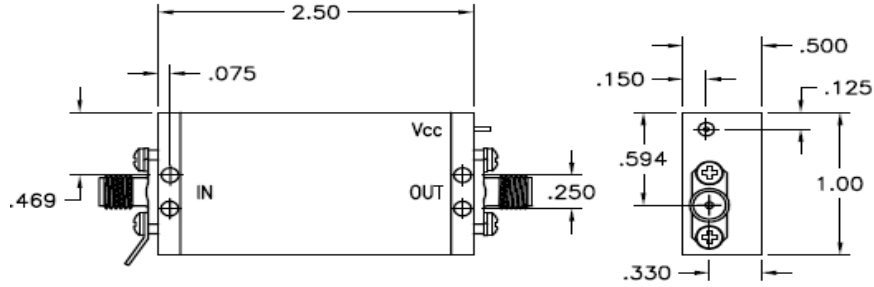

| |

3009 Old State Rd, Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
Fax: 215-799-2563