

## Low Noise RF Amplifier

- \* Operating Frequency : 30-500 MHz
- \* Linear Power : +33 dBm
- \* Noise Figure : 1.7 dB
- \* Gain : 37.5 dB



### ELECTRICAL SPECIFICATION @ VDD= +15VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	30		500	MHz
Gain	G	36	37.5	39	dB
Gain Flatness	$\Delta G$		$\pm 0.3$	$\pm 0.5$	dB
Reverse Isolation	S 12		-60		dB
Noise Figure	NF		1.7	2	dB
Power Output P1dB	P1dB	32	33		dBm
Output 3rd Order Intercept Point	OIP3	43	45		dBm
VSWR in/out	S11/S22		1.6 :1	2.0 :1	Ratio
Operating Voltage	Vdc		15		Volt
Operating Current	Id		750	850	mA

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2.5 x 1.0 x 0.5		in
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		
Cooling	None		

### PROTECTIONS

RF Input Power	+ 5 dBm Max	
Reverse Polarity Protection	Optional	
Load VSWR		
Stability	100%	

### ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0		50°C	°C
Storage Temperature	Tstg	-40		100°C	°C

3009 Old State Road Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
 Fax: 215-799-2563

Outline Drawing

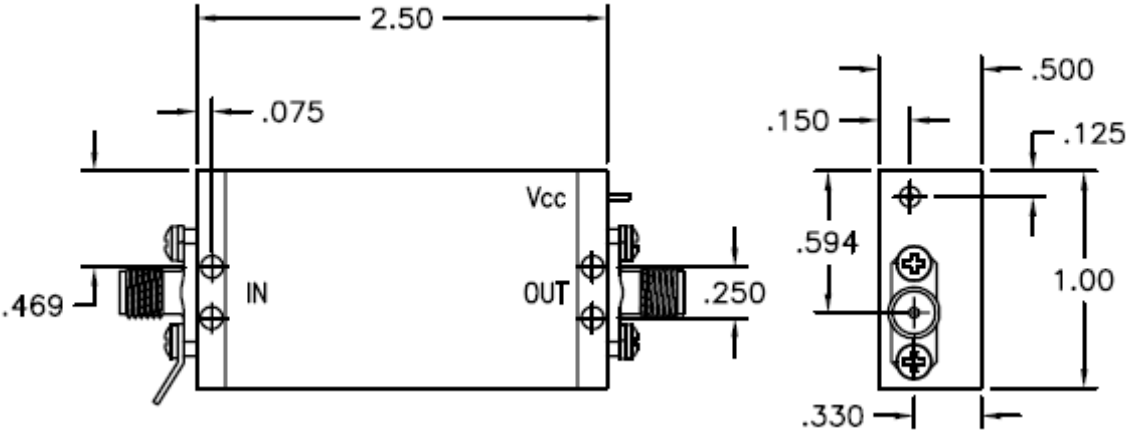

3009 Old State Road Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
Fax: 215-799-2563