

RF Amplifier

- * Operating Frequency : 70-2000 MHz.
- * Gain : 38 dB.
- * Output Power 8 WATT
- * High Gain available
- * No external components required



ELECTRICAL SPECIFICATION @ VDD= +28 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	70		2000	MHz.
Gain	G	35	38		dB.
Gain Flatness	ΔG		± 2.0	± 2.5	dB.
Noise Figure	N.F.		5	7	dB.
Output Power	Psat	5	8		W
IP3 @ 20dBm output per tone 5MHz apart	IP3		35		dBm.
Harmonics @5W	HIP2		-25		dBc.
VSWR In	VSWR1		2.0:1	2.5:1	Ratio
Operating Voltage	Vdc		28		Volt
Operating Current Idq	Idq		1000		mA.

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
RF connector	SMA-F		
DC Pins	Feedthru		
Cooling	None		
Monitor Connector	None		

PROTECTION

	Max	Units
RF Input Power	7	dBm.
Reverse Polarity Protection	N/A	
Load VSWR	Infinite up to 1W	
Stability	100% Tested	


ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0°C		50°C	°C
Storage Temperature	Tstg	- 55°C		120°C	°C

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com


Tel: 215-799-2561
 Fax: 215-799-2563

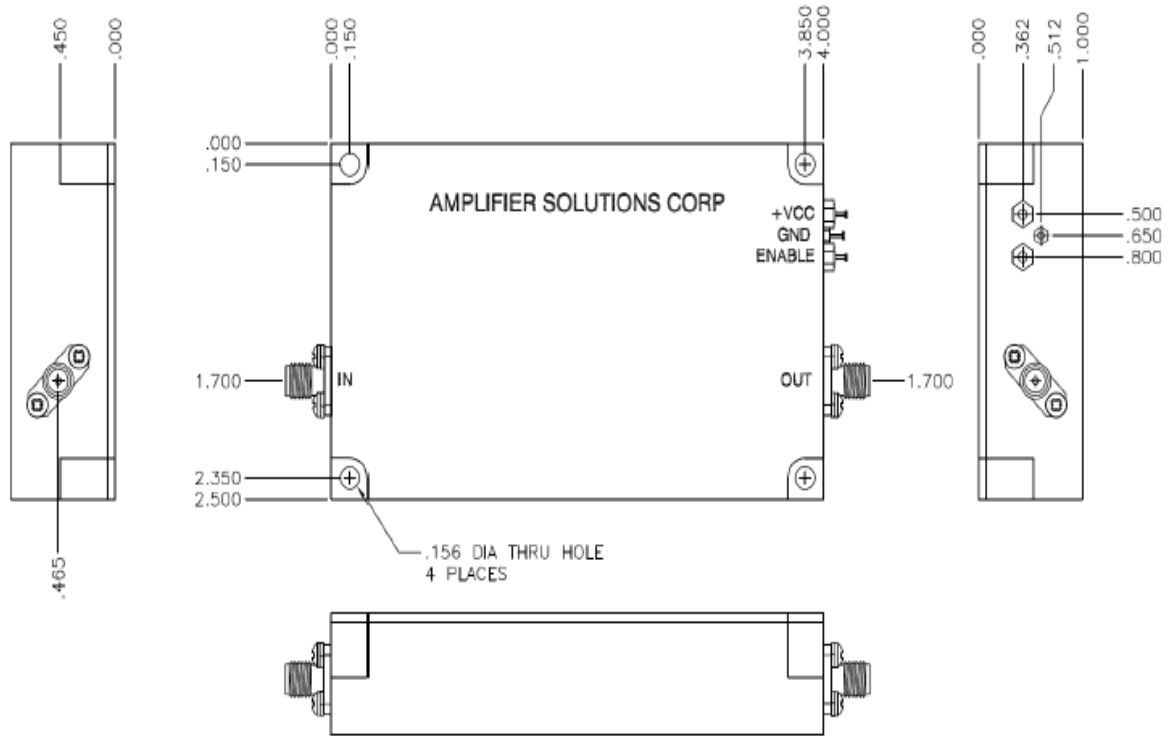

Note: TTL On/OFF Procedure

- 0V.....On
- +5V.....Off

FUNCTIONAL BLOCK DIAGRAM

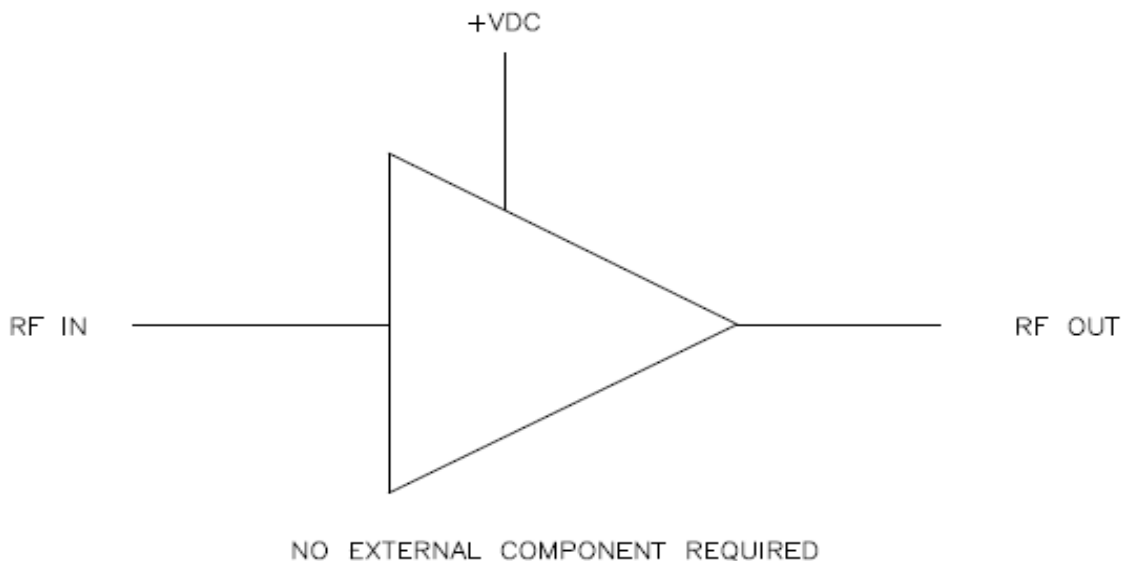

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
Email: sales@amplifiersolutions.com

Tel: 215-799-2561
Fax: 215-799-2563