

RF Amplifier

- * Operating Frequency : 20-3000 MHz.
- * Gain : 20 dB.
- * High IP3 40 dBm.
- * High IP2 60 dBm.
- * No external components required



ELECTRICAL SPECIFICATION @ VDD= +15 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	20		3000	MHz.
Gain	G	17	20		dB.
Gain Flatness	ΔG		± 0.7	± 1.0	dB.
R. Isolation	S12	40			dB.
Noise Figure	N.F.		4	5	dB.
Output Power	P 1dB	24	25		dBm.
Two Tone Intercept @ 10dBm output per tone	IP3	37	40		dBm.
IP2 @ P Out = + 10dBm	IP2	55	60		dBm.
VSWR in/out	S11/S22		1.7:1	2.0:1	Ratio
Operating Voltage	Vdc		15		Volt
Operating Current	Id		400		mA.

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	SMA Housing		
Cooling	None		
Monitor Connector	None		

PROTECTION

		Max	
RF Input Power		10	dBm.
Reverse Polarity Protection	N/A		
Load VSWR	Infinite up to 1W		
Stability	100% Tested		

ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0		50	°C
Storage Temperature	Tstg	- 55C		120°C	°C

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com


Tel: 215-799-2561
 Fax: 215-799-2563

DESCRIPTION: ASC2634C


**FINAL ELECTRICAL TEST REPORT
RECORD DATA @ +25°C ONLY**

TEST Vdc +15V	LIMITS 0°C/+25°C/+50°C	ACTUAL DATA
Gain 20 MHz to 3000 MHz	17.0 dB Min 20.0 dB Typ.	22.3 23.6
Gain Flatness 20 MHz to 3000 MHz	±1.0 dB Max	±0.65
Spurious Response	Accept/Reject	AC
DC Current at +15 Vdc	400 mA Typ.	313
Input VSWR 20 MHz to 3000 MHz	2.0 : 1 max	1.77
Output VSWR 20 MHz to 3000 MHz	2.0 : 1 max	1.8
Noise Figure 100 MHz to 3000 MHz	5.0 dB Max	4.33
P 1.0 dB Compression 20 MHz to 3000 MHz	24.0 dBm Typ.	24.1
IP3 with Pout = +12.0 dBm each tone 1) F1/F2=21/22 MHz, Fc=19/23 MHz 2) F1/F2=1500//1501 MHz, Fc=1499/1502 MHz 1) F1/F2=2998/2999 MHz, Fc=2997/3000 MHz	37.0 dBm Typ.	37.0
IP2 with Pout = +10.0 dBm each tone 1) F1-F2=2995+2945 MHz, Fc=50 MHz 2) F1+F2=1500+1501 MHz, Fc=3001 MHz	55.0 dBm Min	56.0
Stability Test. For all frequency range where $ S_{21} > 0\text{dB}$	0 dB max	< 0

Outline Drawing

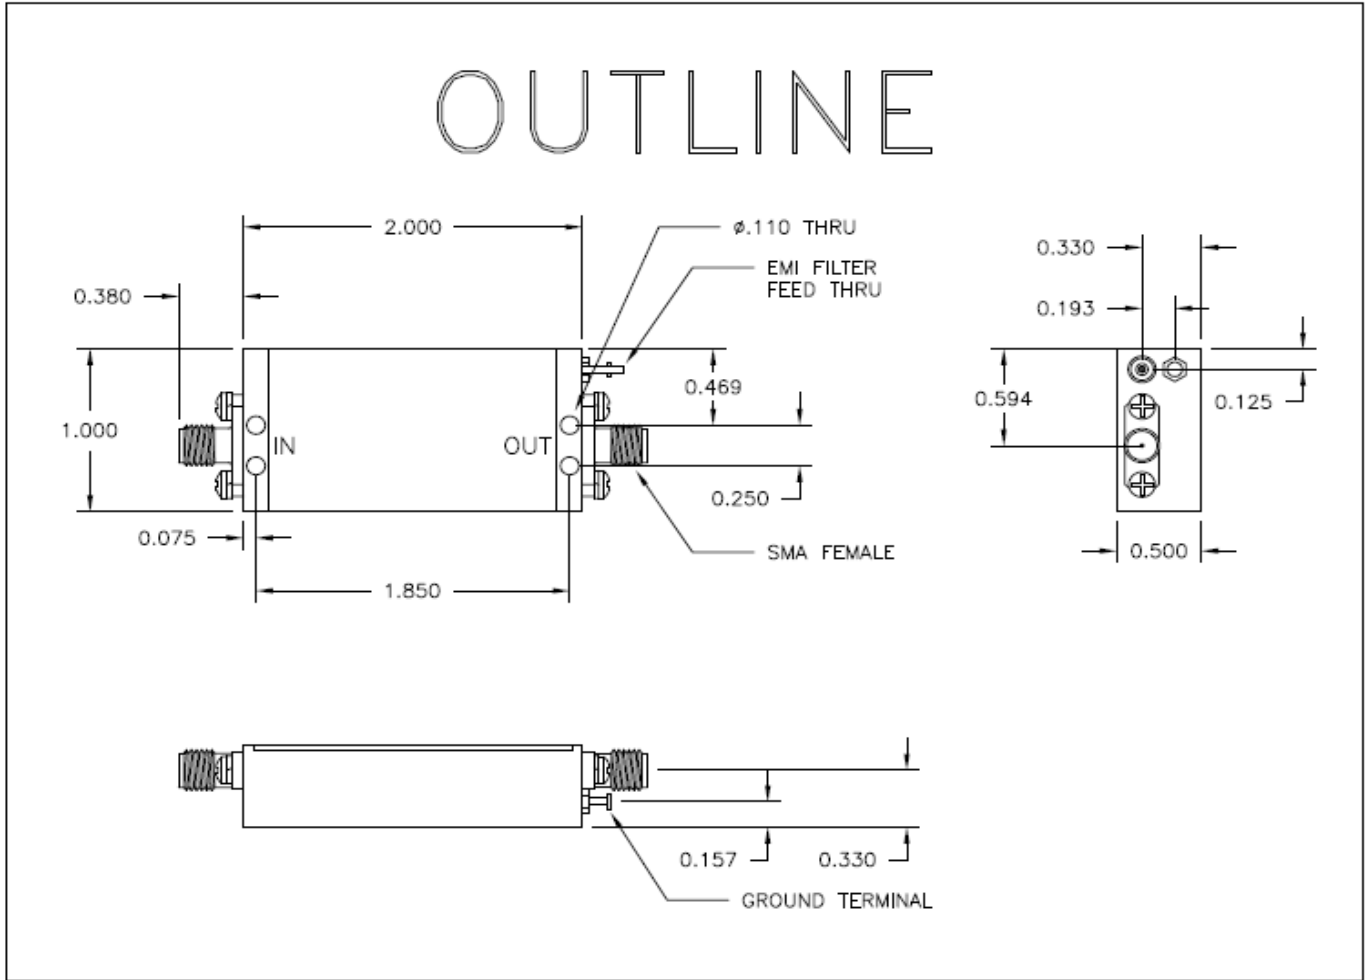

FUNCTIONAL BLOCK DIAGRAM

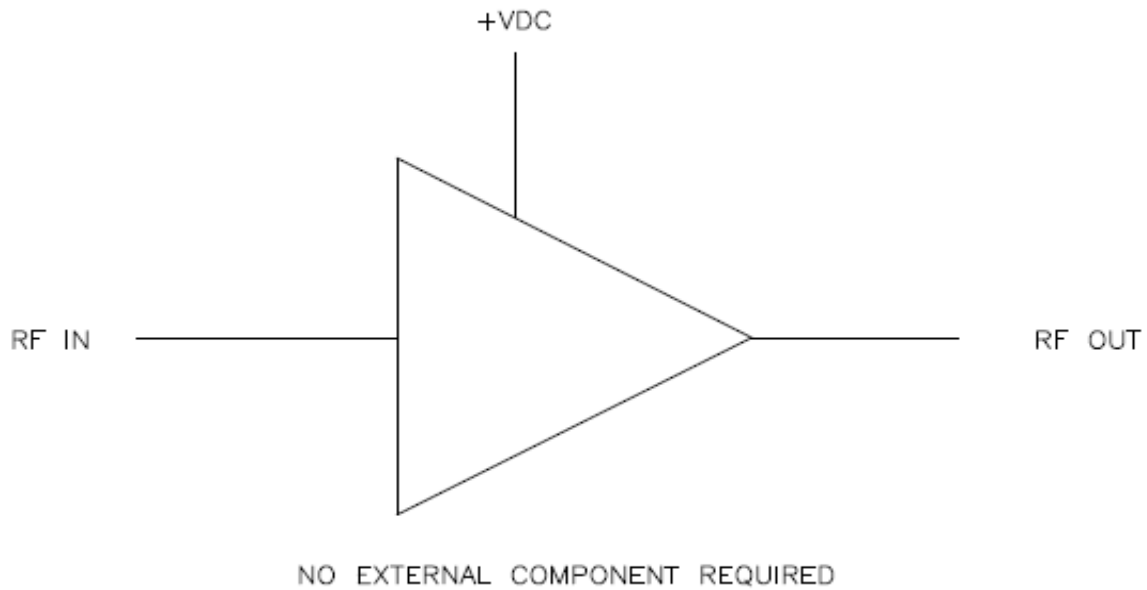

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
Email: sales@amplifiersolutions.com

Tel: 215-799-2561
Fax: 215-799-2563