

## Wide Band RF Amplifier

- \* Operating Frequency : 2.4-2.5 GHz.
- \* Saturated Power : 10W Psat Typical
- \* Gain : 23 dB.
- \* No external components required



### ELECTRICAL SPECIFICATION @ VDD= +12V; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2.4		2.5	GHz.
Gain	G	21	23		dB.
Gain Flatness	$\Delta G$		$\pm 0.3$	$\pm 0.4$	dB.
Power Output	Psat	39	40		dBm.
Return Loss in/out	S11/S22		2.0:1	2.5:1	Ratio
Operating Voltage	Vdc		12		Volt
Operating Current Idq	Idq		2000	2200	mA.

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2x1x0.5		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

### PROTECTIONS

	Max	
RF Input Power	10	dBm.
Reverse Polarity Protection	Optional	
Load VSWR	5:01	RATIO
Stability	Unconditional	

### ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		125°C	°C

3009 Old State Road, Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
 Fax: 215-799-2563

Outline Drawing

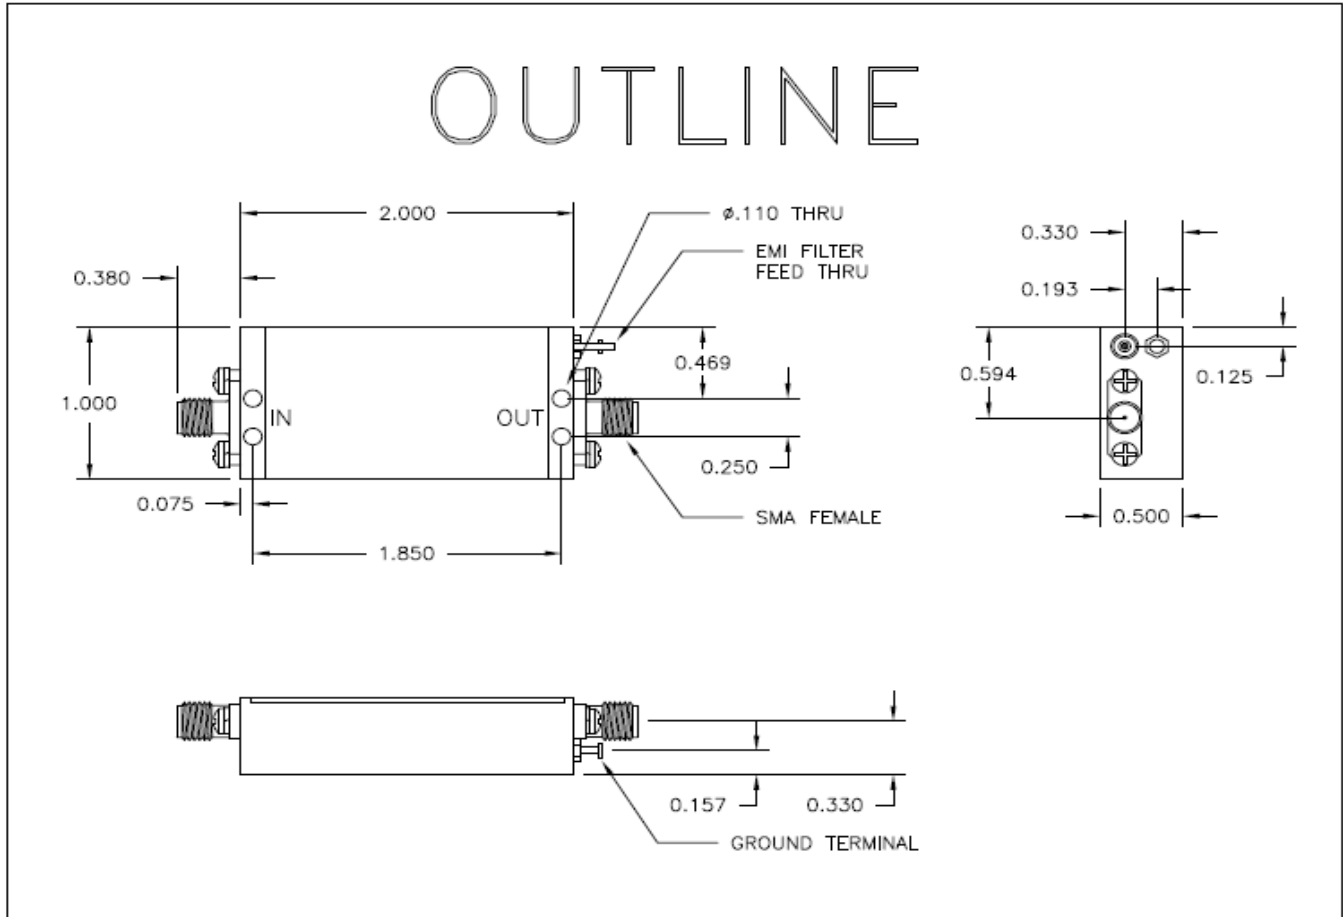


3009 Old State Road, Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
 Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
 Fax: 215-799-2563

FUNCTIONAL BLOCK DIAGRAM

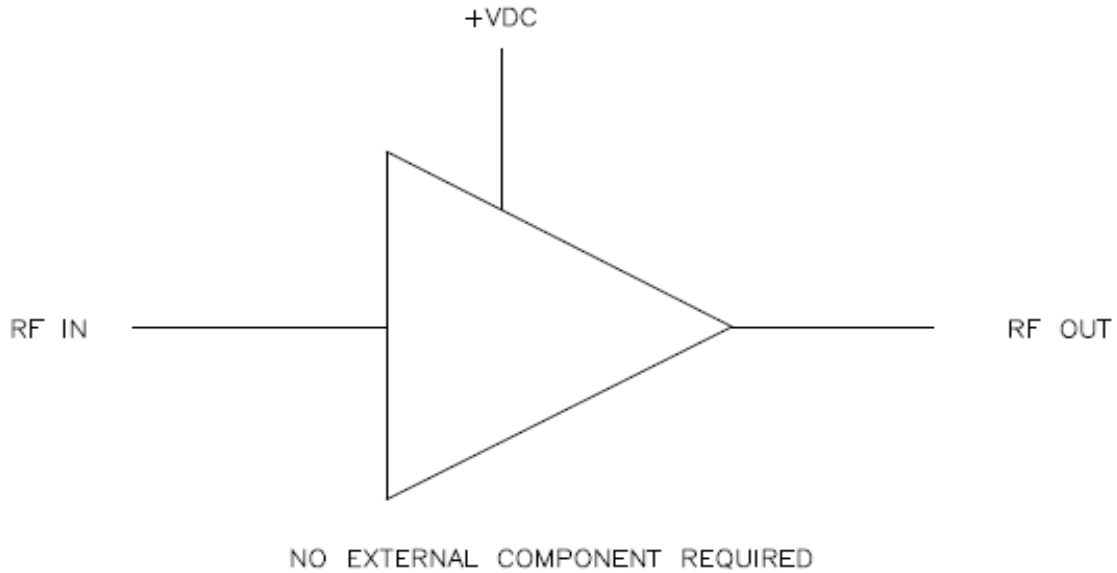

3009 Old State Road, Telford, PA 18969

Web: [www.amplifiersolutions.com](http://www.amplifiersolutions.com)  
Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Tel: 215-799-2561  
Fax: 215-799-2563