


Power RF Amplifier

- * Operating Frequency : 335-535 MHz
- * Power Output: 20 Watts
- * Gain : 32 dB
- * Operation 26 Volts
- * Single, Un-Regulated Supply

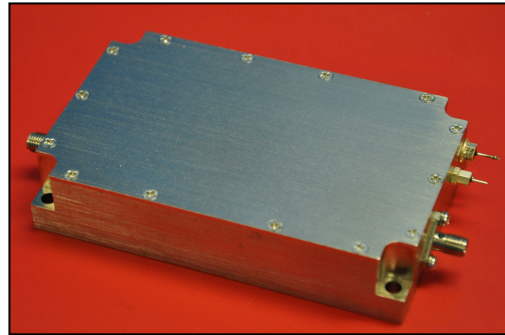

Description: 2 Way Radio,Radar,Jammer, Test Instrumentation, All Purpose Power Amp

ELECTRICAL SPECIFICATION @ VDD= +26 VDC Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	335		535	MHz
Gain	G	32	33	36	dB
Gain Flatness	ΔG		± 0.5	± 1.0	dB
Power Output	P 1 dB	20	21		Watts
Return Loss in/out	S11/S22		1.8:1	2.2:1	Ratio
Operating Voltage	Vdc		26		Volt
Operating Current			4.00	5.00	A

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	4x2.5x1.0		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

PROTECTIONS

	Max	
RF Input Power	13	dBm
Reverse Polarity Protection		
Load VSWR	5:01	RATIO
Stability	Unconditional	

ENVIROMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		70	°C
Storage Temperature	Tstg	-55		125°C	°C

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

