

**Features: (typical values)**


- Ultra High Linearity
- Low Noise Figure
- Rugged Construction
- Operation over wide voltage range
- Usable for 50 ohm operation
- Unconditional Stability

**Maximum Ratings**

Storage temperature ..... -40°C to +100°C  
 DC Operating Voltage ..... +28.0 volts  
 RF Input Voltage ..... 40 dBmV max.  
 Operating Base Temp. ..... +100°C

Specifications @ Tcase = 30°C (Referenced to 75 ohms)

**20 – 1200 MHz  
22dB CATV Ultra-linear  
Amplifier**

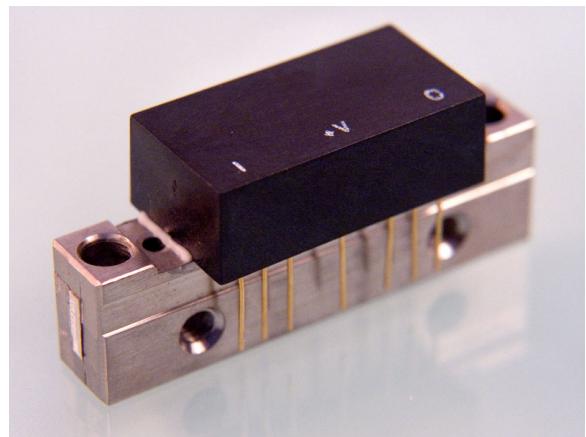

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency Range		20	1200	MHz.
Power Gain	f = 50MHz.	21.0	23.0	dB.
Cable equivalent slope	f = 40MHz. TO 1200MHz.	0	1.5	dB.
Gain Flatness (peak to valley)	f = 40MHz. TO 1200MHz.		0.8	dB.
Input/Output Return Loss	f = 40 To 550 MHz.	18		dB.
Input/Output Return Loss	f = 550To 1200 MHz.	13		dB.
Composite Triple Beat (CTB)	77 channels flat, Vo=44dBmV. Measured @ Channel 78		-57	dB.
Cross Modulation (XMOD)	77 channels flat, Vo=44dBmV. Measured @ Channel 2		-57	dB.
Composite 2 <sup>nd</sup> Order (CSO)	77 channels flat, Vo=44dBmV. Measured @ Channel 78		-57	dB.
IP <sub>3</sub> /IP <sub>2</sub>	2 tones @ +15dbm per tone	46/75		dBm.
Noise Figure (NF)	@ 550 MHz 2.3 dB		5.0	dB.
P1dB	@500 MHZ 35 dbm	30.0		dBm
Total Current (I <sub>TOT</sub> )	@ +24V/400mA	440		mA.

**Pin Configuration**

PIN# .....	Description
1 .....	Input
2,3,7,8 .....	Ground
5 .....	+V.
9 .....	Output
4, 6 .....	Not used

