

Features: (typical values)


- Bandwidth 10-500 MHz.
- Noise Figure 2.0 dB.
- Medium Gain 32 dB.
- No external components required

Maximum Ratings

Storage Temperature -62°C to +125°C
 DC Voltage +17 volts
 RF Input Power 0 dBm.
 Case Temperature +100°C

Specifications (Referenced to 50 ohms)


10-500 MHz Cascadable Amplifier

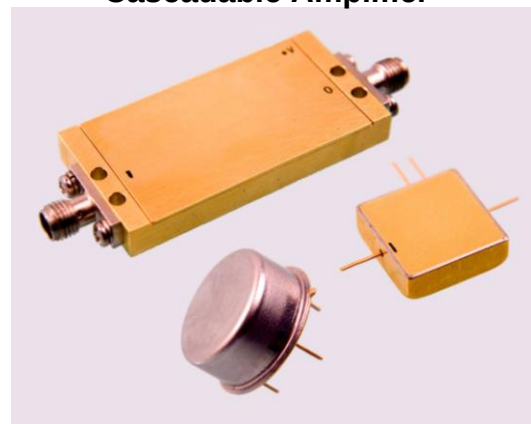

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		10	500	MHz.
Gain	32	30		dB.
Gain Flatness	±0.5		±0.8	dB.
Gain Var. over temp	0.6			ΔdB.
Pout @ 1dB Comp	+10	+8		dBm.
Noise Figure	2		2.5	dB.
Reverse Isolation	40			dB.
IP ₃ /IP ₂ (two-tone)*	20/26			dBm.
VSWR In/Out	1.7:1		2.0:1	
Supply Required	+15/40		+15/55	v/mA.

Min. and max. values are from -55°C to +85°C

*IP₃ and IP₂ are in band output intercept points

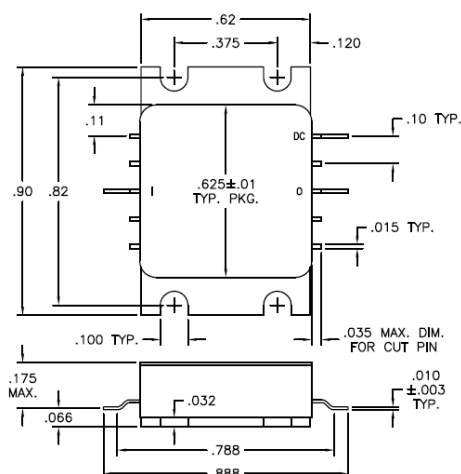

FUNCTIONAL BLOCK DIAGRAM

