

Wide Band RF Amplifier

- * Operating Frequency : 2.0 - 3.3 GHz.
- * Saturated Power : 10W Psat Typical
- * Gain : 32 dB.
- * Single, Regulated +30V Supply
- * Enable/Disable Switch
- * No external components required



Description: Ultra Wideband Operation, Fiber Drivers, Test Instrumentation, All Purpose Power Amp

ELECTRICAL SPECIFICATION @ VDD= +30 VDC Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2		3.3	GHz.
Gain	G	30	32		dB.
Gain Flatness	Δ G		±1.0	±1.5	dB.
Power Added Efficiency	PAE		30		%
Power Output	Psat	39	40		dBm.
Return Loss in/out	S11/S22	2.5:1	2.0:1		Ratio
Operating Voltage	Vdc		30		Volts
Quiescent Current	Idq		1500		mA.

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	4.0 x 2.5 x 1.0		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

PROTECTIONS

	Max	
RF Input Power	12	dBm.
Reverse Polarity Protection		
Load VSWR	5:01	RATIO
Stability	Unconditional	

ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		125°C	°C

3009 Old State Road, Telford, PA 18969


Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

Outline

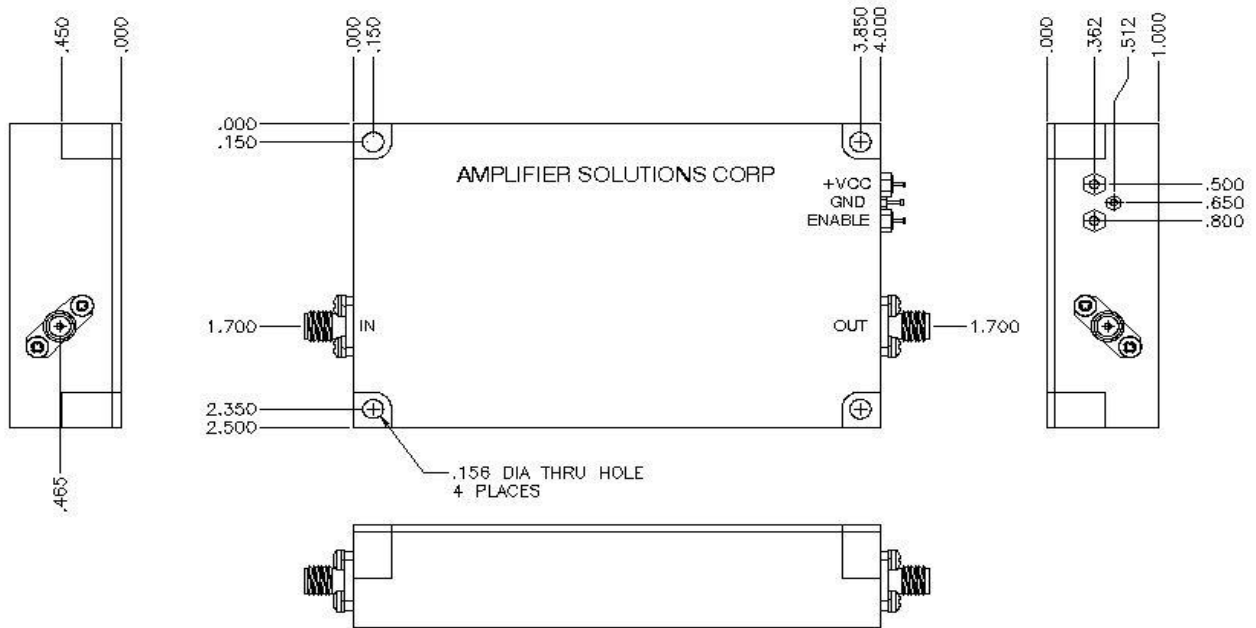

FUNCTIONAL BLOCK DIAGRAM

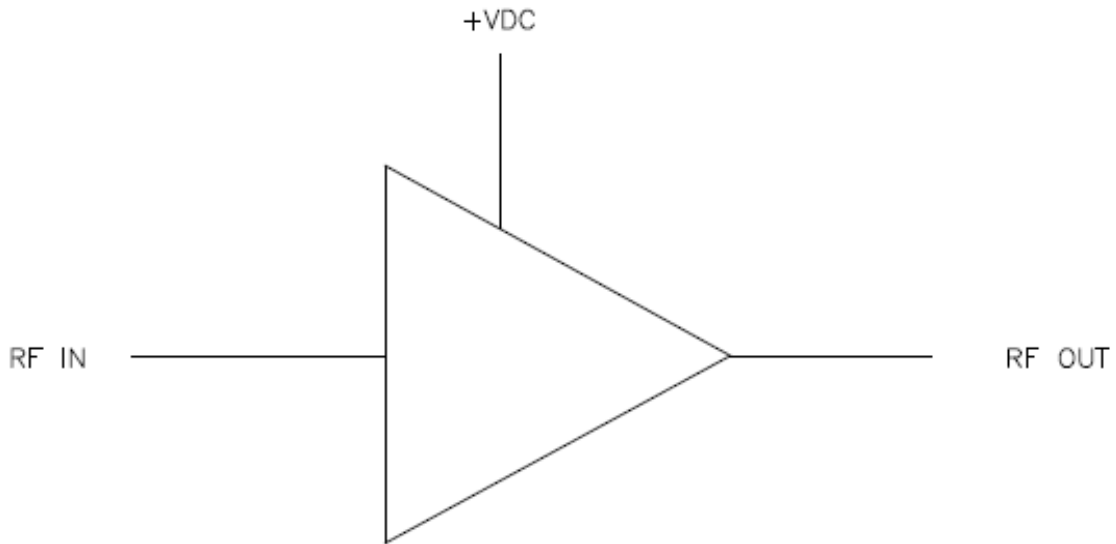

NO EXTERNAL COMPONENT REQUIRED