


RF Amplifier

- * Operating Frequency : 30-2200 MHz.
- * Gain : 35 dB.
- * P1dB 33 dBm.
- * High Gain available
- * No external components required

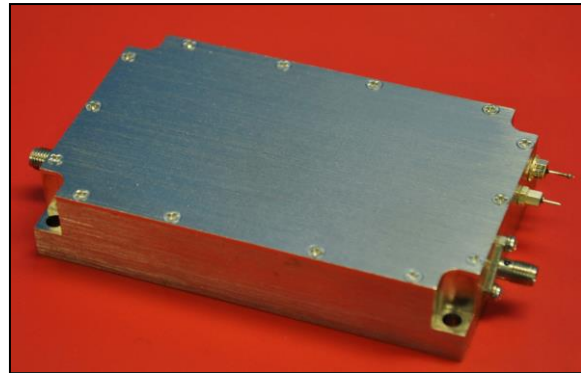

ELECTRICAL SPECIFICATION @ VDD= +28 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	30		2200	MHz.
Gain	G	36	40		dB.
Gain Flatness	ΔG		± 2.0	± 2.5	dB.
Noise Figure	N.F.		5	7	dB.
Output Power	P1dB	30	33		dBm.
Saturated Power	Psat	6	8		W
IP3 @ 20dBm output per tone 5MHz apart	IP3	35			dBm.
Harmonics	HIP2	-20			dBc.
VSWR In	VSWR1		2.0:1	2.5:1	Ratio
Operating Voltage	Vdc		28		Volt
Operating Current Idq	Idq		1300		mA.

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
RF connector	SMA-F		
DC Pins	Feedthru		
Cooling	None		
Monitor Connector	None		

PROTECTION

	Max	Units
RF Input Power	7	dBm.
Reverse Polarity Protection	N/A	
Load VSWR	Infinite up to 1W	
Stability	100% Tested	


ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0°C		50°C	°C
Storage Temperature	Tstg	-55°C		120°C	°C

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

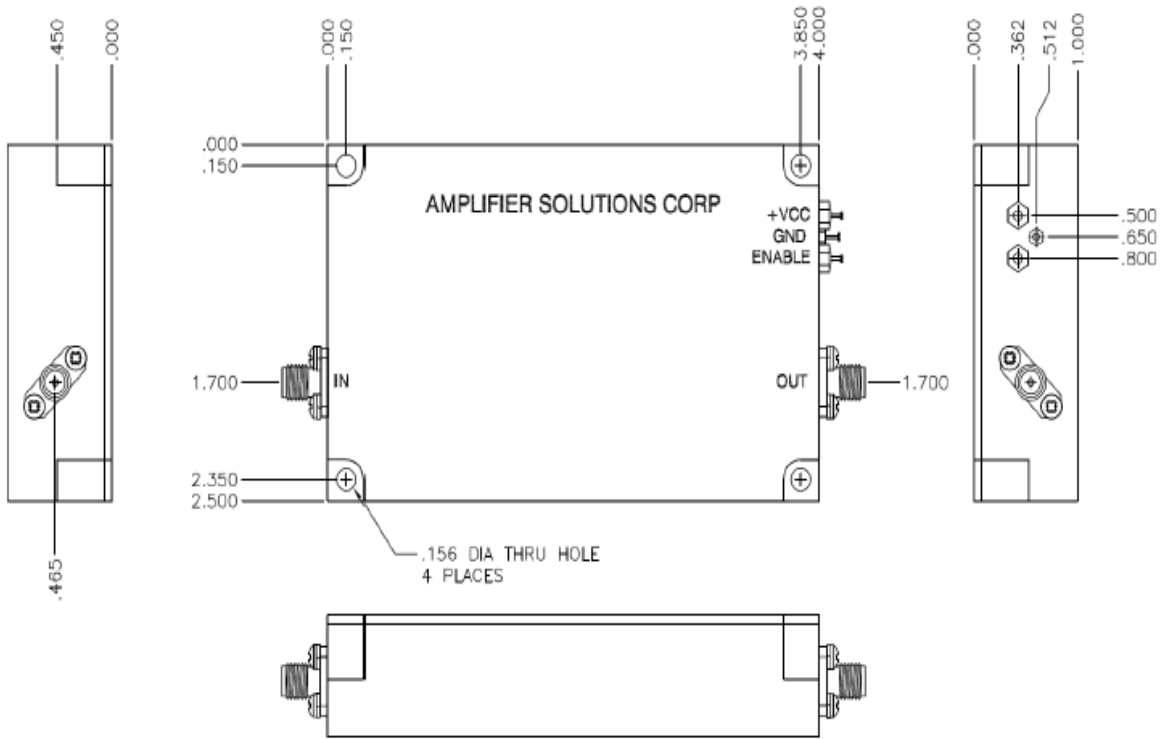

Note: TTL On/OFF Procedure

- 0V.....On
- +5V.....Off

3009 Old State Rd, Telford, PA 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

FUNCTIONAL BLOCK DIAGRAM

