

ASC428C


Features: (typical values)

- Low Distortion
- High Second Order IP2 +75.0 dBm.
- High Third Order IP3 +43.0 dBm.
- High Gain..... +35 dB.

Maximum Ratings

Storage Temperature -55°C to +125°C
 DC Voltage +17 volts
 RF Input Power +15.0 dBm.
 Case Temperature +95°C

**1000-2000 MHz
 Push-Pull Amplifier**

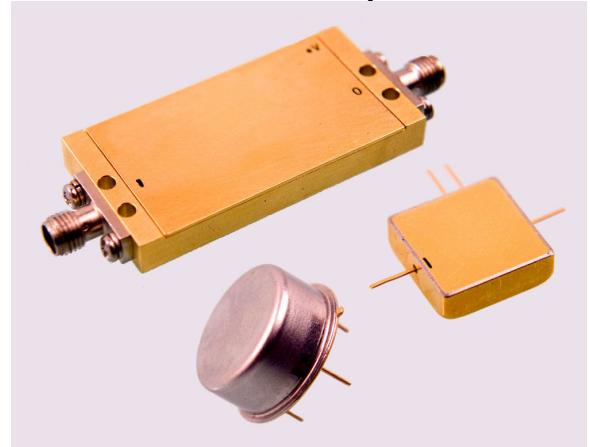

Specifications (Referenced to 50 ohms)

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		1000	2000	MHz.
Gain	35	33	37	dB.
Gain Flatness	±0.3		±1.0	dB.
Gain Var. over temp.	0.5			ΔdB.
Pout @ 1dB Comp	+29	+27		dBm.
Noise Figure	3.5		4.0	dB.
Reverse Isolation	47			dB.
IP ₃ /IP ₂ (two tone)*	43/75			dBm.
HIP2 (2 nd harm.)	75			dBm.
VSWR In/Out	1.4:1		2.0:1	Ratio
Supply Required	+15/950		+15V/970	v/mA

Min. and max. values are from 0°C to +85°C
 *IP3 and IP2 are in band output intercept points

