


RF Amplifier

- * Operating Frequency : 10-3000 MHz
- * Gain : 25dB
- * Low Noise: 2.5dB

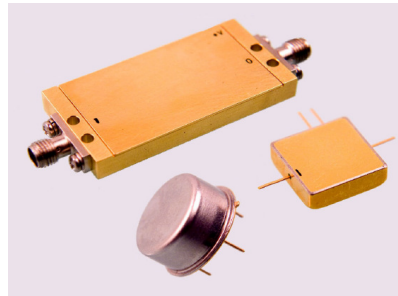

ELECTRICAL SPECIFICATION @ VDD= +12 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	10		3000	MHz
Gain	G	23	25	24	dB
Gain Flatness	Δ G		±0.7	± 1.0	dB
R. Isolation	S12	40			dB
Noise Figure	N.F.		2.5	3	dB
Output Power	P 1dB	15	16		dBm
Two Tone Intercept @ 10dBm output per tone	IP3	25	30		dBm
VSWR in/out	S11/S22		1.8:1	2.0:1	Ratio
Operating Voltage	Vdc		12		Volt
Operating Current	Id		250	300	ma

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	SMA Housing		
Cooling	None		
Monitor Connector	None		

PROTECTION

	Max	
RF Input Power	10	dBm
Reverse Polarity Protection	N/A	
Load VSWR	Infinite up to 1W	
Stability	100% Tested	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0		50	°C
Storage Temperature	Tstg	- 55C		120°C	°C

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

Outline Drawing

