


RF Amplifier

- * Operating Frequency : 70-2000 MHz
- * Gain : 38 dB
- * Output Power 8 WATT
- * High Gain available

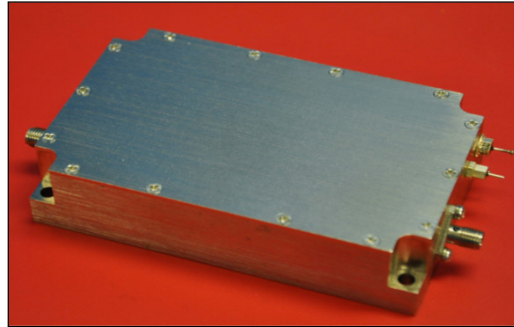

ELECTRICAL SPECIFICATION @ VDD= +28 VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	70		2000	MHz
Gain	G	35	38		dB
Gain Flatness	Δ G		±2.0	±2.5	dB
Noise Figure	N.F.		5	7	dB
Output Power	Psat	5	8		W
IP3 @ 20dBm output per tone 5MHZ apart	IP3		35		dBm
Harmonics @5W	HIP2		-25		dBc
VSWR In	VSWR1		2.0:1	2.5:1	Ratio
Operating Voltage	Vdc		28		Volt
Operating Current Idq	Idq		1000		ma

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
RF connector	SMA-F		
DC Pins	Feedthru		
Cooling	None		
Monitor Connector	None		

PROTECTION

	Max	Units
RF Input Power	7	dBm
Reverse Polarity Protection	N/A	
Load VSWR	Infinite up to 1W	
Stability	100% Tested	


ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max.	Units
Operating Case Temperature	Tc	0°C		50°C	°C
Storage Temperature	Tstg	- 55°C		120°C	°C

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

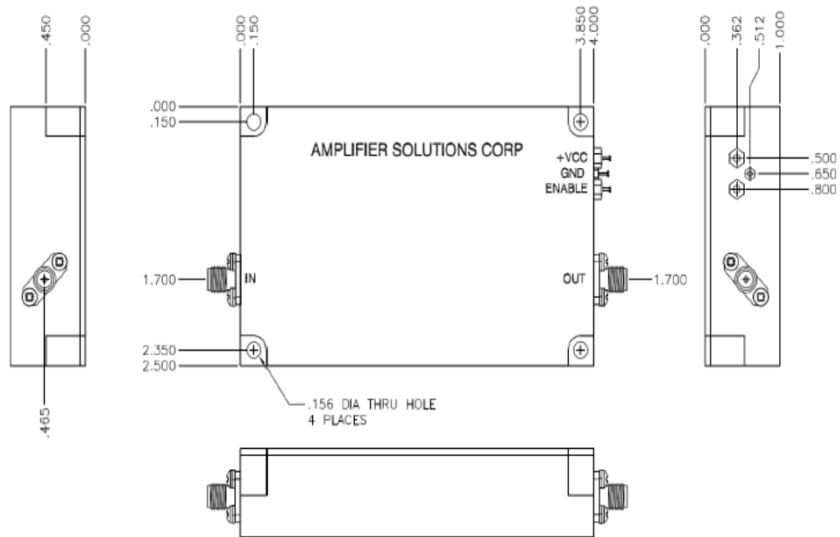

Note: TTL On/OFF Procedure

0V.....On
+5V.....Off

3009 Old State Road Telford Pa 18969

Web: www.amplifiersolutions.com
Email: sales@amplifiersolutions.com

Tel: 215-799-2561
Fax: 215-799-2563