


ASC668C

Features: (typical values)

- High Gain20dB
- Super Low Noise Figure 0.5 dB.
- Output Power +20 dBm.
- No External Components Required.
- Available in TO-8, SMT, Connectorize housing or per customer Requested package

Available in +3V/5V/10V/12V/15V

**10-4000 MHz
Wideband Amplifier
Gain Block
Super Low Cost
Super Low Noise**

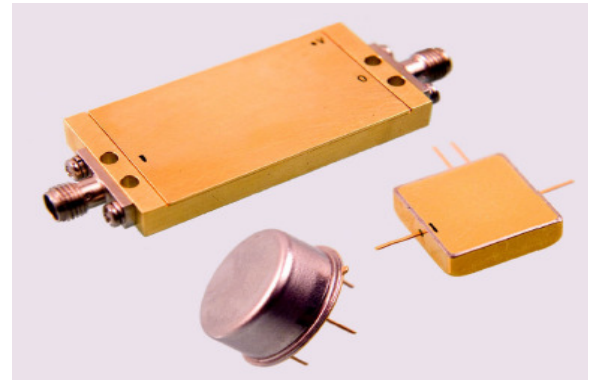

Maximum Ratings


Storage Temperature -62°C to +125°C
 DC Voltage +6 volts
 RF Input Power +10.0 dBm.
 Case Temperature +100°C

Specifications (Referenced to 50 ohms)

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency		10	4000	MHz.
Gain @ 2 GHz	19.1	16.0		dB.
Gain Var. over temp	0.6			ΔdB.
Pout @ 1dB Comp	+20	+15		dBm.
Noise Figure 20-4000MHz	0.8		2.0	dB.
Reverse Isolation	25			dB.
IP ₃ /IP ₂ (two-tone)*	35/45			dBm.
VSWR In/Out 100-3000 MHz	1.8:1		2.0:1	
Supply Required	+5/70		+5/75	v/mA.

Min. and max. values are from 0°C to +85°C

*IP₃ and IP₂ are in band output intercept points

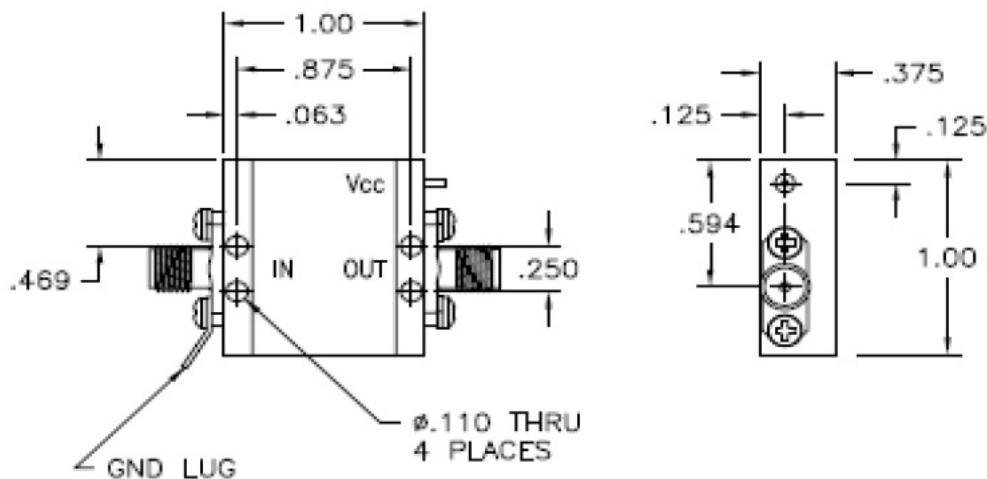

Typical Performance Curves @ +25c

